PROJECT MANUAL

PROJECT NUMBER: 0262-461-2

Clayton B. Wire HVAC

SACRAMENTO CITY UNIFIED SCHOOL DISTRICT

February 28, 2023

K. Temperature and Pressure Relief Valve Piping: ASTM B88, Type L copper tubing, hard-temper, with wrought copper fittings. Provide full solder cup for all fittings. Capped or plugged outlets shall be Schedule 40 screwed brass.

L. Gas Pipe: Schedule 40 black steel conforming to ASTM A53, with malleable iron threaded fittings above grade for piping 2 inch and smaller; welded piping below grade and for above grade piping larger than 2 inches, with Class 150 welding fittings.

1. Appliance Flexible Connectors for Indoor Equipment Without External Spring Isolation:

a. Contractor may choose one of the following:

1) Direct gas pipe connection.

2) Appliance flexible connector:

a) Comply with ANSI Z21.24.

b) Polymer or hot-dipped PVC coated corrugated 304 stainless steel.

c) Operating-Pressure Rating: 0.5 psig.

d) End Fittings: Zinc-coated steel.

e) Maximum Length: 30 inches.

f) Manufacturers: Dormont, Series 30C, 31, 40C, 41, and 51, Brasscraft model ProCoat, or equal.

b. Provide with end connections compatible with equipment and piping system.

c. Equipment located in spaces normally accessible to building occupants, other than maintenance personnel, shall utilize direct gas pipe connection.

d. Provide anti-microbial PVC coating for use with appliances located in kitchen areas.

2. Flexible Gas Connector for Outdoor Equipment Without External Spring Isolation:

a. Contractor may choose one of the following:

1) Direct gas pipe connection.

2) Corrugated stainless steel hose with 304 stainless steel braid covering, CSA certified. Metraflex model GASCT, Unisource Manufacturing series 400, or equal. Provide with end connections compatible with equipment and piping system.

3. Flexible Gas Connector for Equipment with External Spring Isolation, Indoors and Outdoors:

a. Where Drawings indicate installation of mechanical equipment on spring isolation rails spring mounted curbs, or spring hangers, provide metal flexible connectors

1. Install piping from street connection to the property line in accordance with local requirements.

2. 4 inches and larger: PVC, ASTM D3034 - SDR 35; use matching Ring Tite fittings.

3. 3 inches and smaller: Cast iron soil pipe and fittings, asphaltic coated, conforming to ASTM A888 and Cast Iron Soil Pipe Institute Standard 301 and so marked. Pipe and fittings shall be as manufactured by AB&I, Charlotte, Tyler pipe, or equal. Provide ANACO-Husky SD 4000, Clamp-All 125, or equal couplings and No-Hub fittings, meeting the requirements of FM 1680, SD Class I and ASTM C1540. Pipe and fittings shall be the product of a single manufacturer.

B. Grease Waste (GW) and Vent (GV) Pipe: * H R U J H) L V K H U 6 [illegible] ´ , 2 U L R Q) Inc. W L Q ³ 5 L R Q I X V H , 3 , (; Inc ³ (Q I L H O G ´ R U H T X D O S R O \ S U R S \ O H Q H S L S H electrofusion joints. Piping shall comply with ASTM F1412.

C. Acid Waste (AW) and Vent (AV) Pipe: * H R U J H) L V K H U 6 O [illegible] ´ Q 2 U L R Q) L W W Rionfuse CF ´ , 3 , (; Inc. ³ (Q I L H O G ´ R U H T X D O S R O \ S U R S \ O H Q H S L S H electrofusion joints. Piping shall comply with ASTM F1412.

D. Water Service Piping: E(y)18(l)g12( )0 1 118.58 541.75 Tm0 g0 G[(Ri)4(on)4(f)-10(us)-3(e)] TJETQq22BT0065.3

1. Sizes 2 inches and larger (not under building): Gasket style PVC conforming to ASTM D2241-SDR21, Class 200 with gasket type fittings or ductile iron mechanical joint couplings. Gasket fittings shall be one piece injection molded PVC fittings, equal to Fc628(i)5(67(P)4(-8( )-155(F

length shall be 30 inches. Minimum vertical length shall be 30 inches, or greater as required. Provide fusion connection to polyethylene pipe below grade, and screwed connection to steel pipe above grade.

G. Gas Piping Aboveground to 30 inches Belowground: Schedule 40 black steel with beveled ends for welding, with Class 150 welding fittings.

2. Adhesive primer shall have VOC content of 550 g/L or less.

3. Solvent cement and adhesive primer shall comply with testing and product requirements of South

1. General: Tight closing, full lug type, with resilient seat suitable for minimum working pressure of 200 psig, conforming to MSS SP-67.

A. Gate Valves:

1. 2-1/2 inches and smaller: Class150, bronze body, union bonnet, rising stem, solid wedge, threaded or solder ends, conforming to MSS SP-80. Hammond IB641, IB648, Nibco T-134, S-134, Milwaukee 1151, 1169, or equal.

2. 3 inches and larger: Class 125, iron body, bronze mounted, bolted bonnet, non-rising stem, solid wedge, flanged ends, conforming to MSS SP-70. Hammond IR-1138, Nibco F619, Milwaukee F2882A, Stockham G-612, or equal.

3. Underground valves 2 inches thru 12 inches: 250 psi, iron body, Non-rising stem, bolted bonnet, resilient wedge valves, conforming to AWWA C509, equipped with operating nuts, Mueller Series 2360, Nibco F-619-RW-SON, or equal.

    a. Underground valves 3 inches and smaller may be furnished with operating nuts or hand-wheels, and with Ring-Tite joint ends.

    b. Furnish and deliver to Owner one wrench of each size required for operating underground valves.

B. Ball Valves:

1. 2 inches and smaller: 600 psi CWP, 150 psi SWP, cast bronze body, full port, two piece, threaded ends, and reinforced PTFE seal, conforming to MSS SP-110. Nibco T585-70, Milwaukee BA-400, Stockham T-285, or equal.

2. 2-1/2 inches and larger: Class 150, carbon steel body, full port, two piece, stainless steel vented ball, flanged ends, and reinforced PTFE seal, conforming to MSS SP-72. Nibco F-515-CS-F-66-FS, Milwaukee F20-CS-15-F-02-GO-VB, or equal.

3. Compressed Air Services: 600 psi CWP, 150 psi SWP, bronze body, full port, three piece, threaded ends, and reinforced PTFE seal, conforming to MSS SP-110. Nibco Model T-595-Y, Milwaukee BA-300, or equal.

C. Swing Check Valves: Class 125 or 150, bronze body, suitable for regrinding, threaded ends, conforming to MSS SP-80. Stockham B-321, Milwaukee 509, Nibco T-433, or equal.

D. Butterfly Valves:

1. General: Tight closing, full lug type, with resilient seat suitable for minimum working pressure of 200 psig, conforming to MSS SP-67. Bi-direction dead end service with downstream flange removed.

2. Provide valves with the following:

    a. Seats: Suitable for 40 degrees F for cold water service and 250 degrees F for hot water service. Seats shall cover inside surface of body and extend over body ends.

    b. Bodies: Ductile iron or cast iron.

    c. Discs: Bronze or stainless steel.

    d. Stems or Shafts: Stainless steel.

    e. Control Handles: Suitable for locking in any position or with 10 degree or 15 degree notched throttling plates to hold valve in selected position. Provide extended necks to compensate for insulation thickness. Provide gear operator for valves 5 inches and larger.

3. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include the following, or equal:

   a. 2 through 12 inches: Milwaukee Valve, CL series, Nibco, Inc., Model LD2000-3, or equal.

E. Silent Check Valves (for use on pump discharge):

1. General: Provide spring loaded check valves at pump discharge of all pumps.

2. 2 inches and smaller: 250 psi CWP, bronze body, Nibco Model T-480, Milwaukee 548-T, or equal.

3. 2-1/2 inches and larger: Class 250, cast iron body, wafer style, suitable for regrinding. Nibco Model F960, Milwaukee 1400, Mueller 103MAP, or equal.

F. Calibrated Balance Valves (Symbol CBV): Provide globe style valves for precision regulation and control rated 175 psi for sizes 2-1/2 inches through 12 inches and rated 240 psi for bronze sizes 2 inches and below.

1. Manufacturers: Drawing schedules indicate Basis of Design products. Subject to compliance with requirements, provide product indicated on Drawings, or comparable product by one of the following, or equal:

    a. Acorn Engineering Co.

    b. Woodford Manufacturing Co.

2.

a. Padlocks shall be as specified under Section 08 70 00.

b. Chain shall be of carbon steel, 3/8 inch wire diameter, fully welded links and weight of 140 pounds per 100 lineal feet. Chain shall be hot galvanized.

5. Provide capped connections at each test cock. Install in accordance with requirements of Authority Having Jurisdiction.

6. For units installed within buildings, provide drain, connected to unit, to collect spillage from atmospheric vent. Run drain to nearest floor sink or drain.

7. Provide two concrete filled, 6-inch diameter pipe bollards to protect all exposed piping from motor vehicle damage.

8. Manufacturers:

J.

1. Provide single-stage, spring-loaded, corrosion-resistant gas pressure regulators, with die-cast aluminum or cast iron body, complying with ANSI Z21.80. Unit shall be with atmospheric vent, internal relief overpressure protection, threaded ends for 2 inches and smaller, flanged ends for 2-1/2 inches and larger. For inlet and outlet gas pressures, specific gravity, and volume flow refer to Drawings schedule.

2. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include the following, or equal:

Size	Manufacturer/Model
1/2 inch	Elster (American, Singer) model 1213B Itron (Actaris, Slumberger, Sprague) model B42R.
3/4 thru 1-1/4inches	Elster (American, Singer) model 1813C Sensus (Ivensys, Equimeter, Rockwell) model 143-80-12 Itron (Actaris, Slumberger, Sprague) models B42R, B57R, B58R
1-1/2 thru 2 inches	Elster (American, Singer) models 1813, 1813B Sensus (Ivensys, Equimeter, Rockwell) model 243 Itron (Actaris, Slumberger, Sprague) models B43SR, B34R, B38R

B. Gas and Air Outlets:

1. Gas Outlets: Deck mounted Chicago 982-907BC duplex, T&S Brass, or equal; deck mounted Chicago 980-907BC single, or equal, deck-mounted Chicago 984-907BC, four outlets, or equal. Provide integral check valve, and single lever handle in compliance with ADA requirements.

2. Air Outlets: Panel mounted Chicago 986-937CH; deck-mounted Chicago 980-937CH, T&S Brass, or equal. Provide integral check valve, and single lever handle in compliance with ADA requirements.

3. Air Hose Valve: Lincoln 815 coupler and 11659 nipple, Grover, or equal, with ball valve on inlet. Refer to drawing details for additional requirements. Provide Wilkerson Model CB6-04-000 air pressure regulator, or equal.

4. Hose Reels: Lincoln Model 85062, Grover or equal. Provide heavy-duty type with delivery hose, universal swivel, ball stop, shut-off valve, control valve and filter as required.

a. Provide cleanouts in waste drop from each sink and urinal.

b. Provide one wrench for each size and type of cleanout used. Turn over to Owner at completion of the project, and obtain receipt. Place receipt in Operation and Maintenance Manuals.

2. Cleanouts in floor and in concrete sidewalks: Ducco Cast Iron with nickel bronze top, clamping collar and ABS plastic plug: Zurn ZN-1400-KC, or equal, with square or round top to suit floor construction.

3. Cleanouts in composition floors: Zurn ZN-1400-X-DX, or equal (nickel bronze top).

4. Cleanouts in concealed, aboveground cast-iron soil or waste lines: Zurn Z

a. J.R. Smith.

b. MIFAB.

c. Watts.

d. Zurn.

D. Hopper Drains:

1. Manufacturers:

2. Gas shutoff valve shall be placed as close as possible to equipment in a location where it can be serviced. Distance from equipment to valve shall not exceed 6 feet.

Q. Connect movable gas-fired cooking equipment utilizing flexible gas connection system.

3.19 LABORATORY EQUIPMENT AND CASEWORK INSTALLATION

A. Coordinate all work with Specification Section for Laboratory Equipment and Casework.

B. Furnish and install all required P-traps. Traps shall be Enfield, Fuseal, or equal.

C. Provide stops on all hot and cold water lines at equipment in an accessible position.

D. Seal floor openings watertight.

E. Provide approved vacuum breaker or anti-siphon device on water lines to equipment wherever required.

F. All horizontal piping lines connected to equipment shall be run at the highest possible elevation not less than 6 inches above floor. Piping rough-in shall be stubbed in walls wherever possible.

G. Vent piping for waste lines shall be concealed and vents for island or freestanding equipment shall be looped.

3.20 DOMESTIC WATER SYSTEM STERILIZATION

[END OF SECTION 22 10 00]

SECTION 23 80 00

HEATING, VENTILATING AND AIR CONDITIONING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

26. Hydronic Piping Specialties.

27. Expansion loops.

28. Valves.

29. Valve boxes.

30. Insulation.

31. Thermal hanger shield inserts.

1.2 RELATED REQUIREMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

B. Section 23 00 50, Basic HVAC Materials and Methods.

C. Section 23 05 93, Testing, Adjusting, and Balancing for HVAC.

D. Section 23 09 23, Direct Digital Control (DDC) System for HVAC.

1.3 ADMINISTRATIVE REQUIREMENTS

A. Preinstallation Meetings:

1. 9DULDEOH 5HIULJHUDQW)ORZ 6\VWHP &RQIHUHQFH ,QVWD
conference at Project site wLWK GHVLJQ (QJLQHHU DQG HTXLSPHQW PDQ
FRPSO\ ZLWK UHTXLUHPHQWV RI WKLV 6HFWLRQ DQG P€ WDWL

B. Provide minimum 1/4 inch equals one foot scaled coordinated layout drawings showing plan and pertinent section or elevation views of piping, ductwork, equipment, accessories, and electrical systems. Drawings shall be reproducible and work of each trade represented shall be fully coordinated with structure, other disciplines, and finished surfaces. Drawings shall be presented on a single size sheet. Coordinated layout drawings shall have title block, key plan, north arrow and sufficient grid lines to provide cross-reference to design Drawings.

1. Provide a stamp or title block on each drawing with locations for signatures from all contractors involved, including but not limited to the General, HVAC, Plumbing, Fire Protection, and Electrical contractors. Include statement for signature that the contractor has reviewed the coordinated layout drawings in detail and has coordinated the work of his trade.

2.

2. Condenser fans shall be of the direct-driven propeller type, with corrosion-resistant aluminum blades. Fans shall be dynamically balanced and discharge air upwards. Induced-draft blower shall be of the direct-driven, single inlet, forward-curved, centrifugal type, made from aluminized steel with a corrosion-resistant finish and shall be dynamically balanced.

3. Induced draft fan shall be of the direct driven, single inlet, forward-curved centrifugal type. Fan wheel shall be steel, with corrosion resistant finish, dynamically balanced.

I. Motors:

1. Compressor motors shall be cooled by refrigerant gas passing through motor windings and shall have line break thermal and current overload protection.

2. Evaporator fan motor shall have permanently lubricated, sealed bearings and inherent automatic-reset thermal overload protection or manual reset calibrated circuit breakers.

3. Totally enclosed condenser-fan motor shall have permanently lubricated, sealed bearings, and inherent automatic-reset thermal overload protection.

4. Induced-draft motor shall have permanently lubricated sealed bearings and inherent automatic-reset thermal overload protection.

5. For single-phase fan motors sized larger than 1/12 hp and smaller than 1 hp, refer to Article, Electric Motors, in Section 23 00 50, Basic HVAC Materials and Methods.

J. Compressor:

1. Fully hermetic, scroll type with internal high-pressure and temperature protection.

2. Factory installed rubber shock mounted and internally spring mounted for vibration isolation.

3. Compressor Anti-Recycle Timer: Compressor shall be prevented from restarting for a minimum of five minutes after shutdown, with manufacturers installed compressor cycle delay.

K. Coils:

1. Standard evaporator and condenser coils shall have aluminum plate fins mechanically bonded to seamless internally finned copper tubes with all joints brazed.

2. Units shall have face-split type evaporator coils.

3. For units with single compressor, condenser coils shall be single slab, single pass design. For dual compressor units, condenser coils shall be single slab, 2 pass design.

4. Evaporator coils shall be leak tested at minimum 150 psig, and pressure tested at minimum 450 psig.

5. Condenser coils shall be leak tested at minimum 150 psig, and pressure tested at minimum 650 psig.

L. Heating Section:

1. Induced-draft combustion type with direct-spark ignition system and redundant main gas valve with 2-stage capability on all 3-phase units.

2. Heat Exchanger:

a. The standard aluminized heat exchanger shall be of the tubular-section type constructed of minimum 20-gage aluminized steel.

5. When third party direct digital controls with an Energy Management System will be utilized for single zone VAV units, provide microprocessor controls with BACnet or LON interface. Units shall have factory mounted supply fan variable frequency drives.

6. Electro-mechanical controls shall include the following, as a minimum:

   a. Service run test capability.

   b. Provide compressor minimum run time (3 minutes) and minimum off time (5 minutes).

   c. Economizer control.

   d. Unit shall have 35° F low ambient cooling operation.

   e. Time delay relay.

7. Microprocessor controls shall include the following, as a minimum:

   a. User diagnostic interface.

   b. Unit control with standard suction pressure transducers and condensing temperature thermistors.

   c. Shall provide a 5° F temperature difference between cooling and heating set points to meet ASHRAE 90.1 energy standard.

   d. Service run test capability.

   e. Shall accept input from a CO2 sensor (indoor).

   f. Configurable alarm light shall be provided which activates when certain types of alarms occur.

   g. Provide compressor minimum run time (3 minutes) and minimum off time (5 minutes).

   h. Service diagnostic mode.

   i. Economizer control.

   j. Unit shall have 0° F low ambient cooling operation.

   k. Time delay relay.

P. Safeties:

1. Unit shall incorporate a solid-state compressor lockout that provides optional reset capability at the space thermostat, sh2u Q qo056Mf 1 0 0 1 115.22 5345f 1 Cf.

HEATING,

M. Controls:

b. Low-pressure protection.

c. Freeze protection (evaporator coil).

d. High-

C. Blower: Double width, double inlet centrifugal type fan, statically and dynamically balanced. Blower motor shall be single speed, open drip proof, and energy efficient. Motor bearings shall be permanently lubricated ball bearing or pillow block type. Blower and motor shall be vibration isolated.

1. For single-phase fan motors sized larger than 1/12 hp and smaller than 1 hp, refer to Article, Electric Motors, in Section 23 00 50, Basic HVAC Materials and Methods.

2. Drive: V-belt drive with matching fan pulley and adjustable motor sheaves and belt assembly. Linked blower belts will not be accepted.

D. Heating Section: CSA certified for use with natural gas, 80 percent minimum thermal efficiency. Heating section may be integral to blower cabinet or be provided as separate section. Provide with the following features:

1. Modulating gas valve, capable of turndown to minimum 25 percent of gas input value scheduled on Drawings.

2. Stainless steel burner assembly.

3. Combustion air vent fan: Direct drive centrifugal type.

4. Electronic discharge temperature controller. Control interface shall be LCD screen with indicating lights. Default display shall be actual discharge temperature.

5. Direct spark ignition with non-standing pilot.

6. 409 Stainless steel tubular heat exchanger.

7. Controls and Safeties: All burner controls factory wired to terminal blocks, complete with 24 V transformer. Provide the following:

a. High temperature limit control with automatic reset.

b. Ignition with 100 percent timed lockout.

4) Return air temperature.

5) Outdoor air temperature.

6) Heater output (0-100 percent).

7) Modulating damper output or VFD control (0-100 percent).

J. Evaporative Cooling Module: When scheduled on Drawings, provide evaporative cooling module with pump and water metering system. Evaporative cooling module shall be wired and mounted to the base unit at the factory. Provide the following:

1. Cabinet: 300 series stainless steel with finish equal to that described for unit cabinet. Cabinet may be galvanized steel when internal cooling module is of all stainless steel construction. Cabinet shall include louvered intake and 2 inch aluminum mesh filters.

2. Water reservoir: 300 series stainless steel. Overflow and drain connections in the drain pan bottom to be 1/2 inch diameter pipe or standard hose thread.

3. Pump: Submersible, centrifugal sump pump with inlet strainer, balancing valve located in pump discharge, thermally protected, fan cooled motor with moisture-proof windings.

4. Media: Media shall be 12 inch thick GlasDek by Munters Corporation, or equal, cross-fluted pad material of large fibers bonded together by inorganic, non-crystalline fillers and conforming to UL900, Class 2 rating. Pads will have less than .25 inches water column air pressure drop at 550 fpm face velocity when wet, and develop a saturation efficiency of not less than 90 percent.

5. Water hammer arrestor (furnished by piping contractor).

6.

B. Quality Assurance:

1. Unit shall be ETL or UL listed and labeled.

2. Unit shall be manufactured in a facility registered to ISO 9001:2000.

3. Unit shall be rated in accordance with ARI standard 210.

C. Delivery, Storage and Handling:) R O O R Z P D Q X I D F W X U H U ¶ V U H F R P P H Q G D W L R Q V

D. Heating/Cooling System: The total certified heating/cooling capacity shall not be less than scheduled. The compressor power input shall not exceed that of the unit specified.

E. Indoor Section: Wall mounted, ceiling surface mounted, or ceiling recessed mounted, as indicated on Drawings.

1. Cabinet:

a. Wall mounted: Molded white high strength plastic.

1) Provide wall mounted unit with factory mounting plate.

b. Ceiling surface mounted: Molded white high strength plastic with provision for outside air duct connection.

c. Ceiling recessed mounted: galvanized steel with provision for outside air duct connection.

2. Fans: Double inlet, forward curved, statically and dynamically balanced.

3. Fan Motor: Direct drive, permanently lubricated, with two or 4 speed operation for unit size scheduled on Drawings.

a. For single-phase fan motors sized larger than 1/12 hp and smaller than 1 hp, refer to Article, Electric Motors, in Section 23 00 50, Basic HVAC Materials and Methods.

4. Air Outlet: With motorized horizontal and vertical vanes.

a. Wall and ceiling surface mounted units: Horizontal vane shall close air outlet upon unit shut-down.

5. Evaporator Coil: Aluminum fins mechanically bonded to copper tubes. Coils shall be pressure leak tested.

6. Insulation: Interior surfaces exposed to the airstream shall be fully insulated.

F. Outdoor Section:

1. Casing: Galvanized steel plate, powder coated with acrylic or polyester.

2. Condenser Fan Grille: ABS plastic.

3. Fan and fan motor: Direct drive, totally enclosed, propeller type, permanently lubricated, horizontal discharge.

4. Compressor: Variable speed rotary type, with crankcase heater and accumulator. Compressor shall be capable of operating at 0 degrees F. Compressor mounted on vibration isolator pads.

5.

Alumi000092 0 612 792 re W* n BT /F2 9.96 Tf 1 0 0 1 344.59 110.16 Tm 0 g 0 G T9E2 re W* n BT /F2 9.96 Tf 1 0 0 1 572.62 306.7

G. Controls: Hard wired, microprocessor based, wall mounted controller with LCD display shall provide the following functions, as a minimum:

1. 7-day programmable timer.

2. Test and check functions.

3. Diagnostic functions.

4. Vane position control.

5. Fan speed adjustment.

6. Temperature adjustment.

7. Automatic restart.

8. Mode selection, including heat/auto/cool/dry/fan.

a. Provide lockable enclosure for wall mounted controller.

H. Safeties: Shall include the following, as a minimum:

1. Five minute compressor anti-recycle timer.

2. High pressure protection.

3. Current and temperature sensing motor overload protection.

I. Filters: Provide manufacturers washable filters for indoor unit. Provide sufficient filters for four complete changes for each unit.

J. Service Access: All components, wiring, and inspection areas shall be completely accessible through removable panels.

K. Refrigerant Piping:

1. Provide factory pre-charged and sealed line set piping, length to suit the location of equipment. Tubing sizes shall be in accordance with manufacturers written instructions.

2. Provide refrigeration piping in accordance with Article, Refrigerant Piping, in this Section.

L. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include the following, or equal:

1. Mitsubishi Electric Corporation.

2. Carrier / Toshiba Corporation.

3. Daikin

M. Owner Training: Manufacturer shall provide one on-site 2- K R X U W U D L Q L Q J V H V V L R Q I R U 2 personnel.

2.7 SPLIT SYSTEM AC UNIT

A. General: Furnish and install split system air conditioner, with R410A refrigerant, and complete with automatic controls. Equipment shall be shipped factory assembled, wired, tested, and ready for field connections.

B. Quality Assurance:

1. Unit shall be ETL or UL listed and labeled.

2. Unit shall be manufactured in a facility registered to ISO 9001:2000.

3. Unit shall be rated in accordance with ARI standard 210.

C. Delivery, Storage and Handling:

3. Hitachi w/BAcnet integration to Johnson Controls

B. Indoor Units

1. General:

a. Galvanized steel casing.

b. Ducted, ceiling-recessed, or in-room units per Drawings schedule. Available styles shall include:

1) Concealed (ducted) units:

a)

b. The fan motor shall be thermally protected.

c. The fan motor shall be equipped as standard with adjustable external static pressure (ESP) settings.

d. For single-phase fan motors sized larger than 1/12 hp and smaller than 1 hp, refer to Article, Electric Motors, in Section 23 00 50, Basic HVAC Materials and Methods.

e. Ceiling

b. The coils shall be pressure tested at the factory.

c. Unit shall be provided with ball-type refrigerant service valves at each refrigerant piping connection.

d. Condensing unit cabinet shall be provided with metal coil guard.

5. Compressor:

a. The scroll compressors shall be variable speed pulse-width inverter (PVM inverter) controlled type, hermetically sealed, which shall vary the compressor speed to follow fluctuations in total cooling and heating load, determined by the suction gas pressure as measured

3. Programmable Local Remote Controller: The programmable local remote controller shall be capable of controlling a minimum of 16 indoor units serving a single zone, and of operation with or without a central controller. Controller shall have the following minimum functions:

    a. On/Off.

    b. Operating mode (cool, heat, auto, dry, and fan, depending on selected system type).

    c. Temperature setting.

    d. Fan speed setting.

    e. Air swing settings.

    f. Room temperature and humidity display.

    g. Occupancy sensor capable.

    h. Schedule operations.

    i. Allow/Prohibit local remote control functions.

    j. Unit level error code display.

    k. Test run.

    l. Set temperature range limit.

    m. Override of scheduled functions for indoor unit groups.

    n. Lock out of On/Off, Mode, Set Temp., Hold-button, and Air Direction.

4. Centralized Controller: The controller shall support system configuration, daily/weekly scheduling, monitoring of operation status, error email notification, online maintenance tool and malfunction monitoring. The controller shall have basic operation controls which can be applied to an individual indoor unit, a group of indoor units, or all indoor units. (cool, heat, auto, dry, and fan[0 6ndmonitoring. Tl

E. Fans and Motors:

1. Centrifugal supply air blower shall be constructed of galvanized steel, statically and dynamically balanced.

2. Blower motor shall be direct drive variable speed ECM type, with sealed permanently lubricated ball bearings.

3. Inducer motor shall be direct drive variable speed ECM type, with sealed permanently lubricated ball bearings.

F. Heating Section:

1. Primary heat exchanger shall be 20 gauge corrosion resistant aluminized steel of fold-and-crimp sectional design, with Monoport inshot burners and redundant gas valve.

2. Secondary heat exchanger shall be polypropylene laminated steel of fold-

3. Unit to be equipped with factory-supplied high-pressure switch, low pressure switch, and filter drier.

4. 3 U R Y L G H X Q L W Z L W K P D Q X I D F W X U H U ¶ V U H I U L J H U D Q W O L Q H V

5. Provide refrigeration piping in accordance with Article, Refrigerant Piping, in this Section.

J. Condenser Coil:

1. Air-cooled condenser coil constructed of aluminum fins mechanically bonded to copper tubes.

2. Coils shall be leak and pressure tested.

K. Electrical Requirements:

1. Unit shall have single point power connection.

2. Provide unit with 24V control circuit.

L. Operating Characteristics:

1. Unit shall be capable of starting and running a 115 degrees F ambient outdoor temperature per maximum load criteria of ARI Standard 210.

2. Compressor with standard controls shall be capable of operation down to 55 degrees F ambient outdoor temperature.

M. Provide the following additional components and features:

1. Provide evaporator freeze thermostat, winter start control, compressor start assist capacit /P << n W* n

2.12 REFRIGERATION PIPE AND FITTINGS

A. Refrigeration gas and liquid piping shall be type ACR hard drawn copper tubing, cleaned and capped in accordance with ASTM B280, with wrought copper fittings. All joints shall be brazed with Sil-fos under nitrogen purge. Relief valve discharge piping shall be full size of relief discharge port.

1. Manufactured, pre-charged and pre-insulated refrigerant line-set refrigerant piping may be utilized D W & R Q W U D F W R U ¶ V G L V F U H W L R Q

a. VRF Systems: Use of manufactured, pre-charged and pre-insulated refrigerant line-set refrigerant piping between outdoor condensing units and indoor heat recovery controllers, or distribution headers and tees is not allowed. : K H Q V \ V W H P P D Q X I D F W X U H U instructions allow use of refrigerant line-set piping between indoor heat recovery controllers, or distribution headers and tees, and air terminal devices, follow instructions for allowable pipe size range and support to avoid forming traps in the piping.

B. Variable Refrigerant Flow Heat Pump Systems Fittings:

1. For systems manufacturers requiring engineered, pre-assembled headers and branch fittings, Contractor shall obtain such fittings from system manufacturer. Fittings shall be suitable for system type and configuration.

2. For systems manufacturers not requiring engineered, pre-assembled headers and branch fittings, & R Q W U D F W R U V K D O O I X U Q L V K I L W W L Q J V F R P S O \ L Q J Z L W K P D C

C. Refrigeration Piping Specialties: Furnish and install Superior, Sporlan, Alco, Henry, or equal, stop valves, solenoid valves, adjustable thermal expansion valves, sight glass, flexible connection, charging valve, and drier with valve bypass in the liquid lines and Superior DFN shell and cartridge suction line filter sized 2-1/2 times tonnage.

1.

1. Centrifugal fan with airfoil blades, aluminum or steel housing, externally mounted belt-drive motor, external lube tubes, integral support brackets.

2. Provide sloped roof or flat roof type roof cap, or wall cap to suit the location indicated on the Drawings.

G. Ceiling Mounted Fans:

1. Acoustic lined cabinet, built-in back draft damper, vibration isolated fan and motor, variable speed switch.

2. Provide sloped roof or flat roof type roof cap, or wall cap to suit the location indicated on the Drawings.

H. Fan Drives:

1. Drive Design: The design horsepower rating of each drive shall be at least 1.5 times, single belt

2. Casing: Sheet metal or polycarbonate plastic. Provide internal or external vibration isolation to effectively prevent transmission of vibration and noise from units to building structure. Units shall completely house all parts and have manufacturer's standard finish coating.

3. Fans: Ruggedly constructed, statically and dynamically balanced. Noise level shall not exceed 77 dBA measured at 5 feet distance.

4. Air Discharge Outlet Nozzle: Cover full width of door opening. Fan discharge ducts, plenum, flow control vanes and nozzles shall provide a uniform distribution of air over entire length of door. Provide adjustable volume and directional control.

5. Heating Coil: Provide electric heating coil. Maximum discharge air temperature shall be 120 degrees F.

6. Controls: Provide on-off door operated switch. The "on-off" switch circuit shall close to start fan

c) Local override to turn HVAC on. Capable of manual override through control system operator.

d) Access for connection of portable operator terminal.

9. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include the following:

a. Price Limited.

b. Titus.

c. Johnson Controls, I W* n B9.96 T312 Tf 1 0 21 Q q 0.00.

Ceiling dampers for ceilings constructed of wood shall have UL tested in design L501 and shall be Ruskin CFD7, Pottorff, or equal.

d. Combination fire/smoke dampers. Dampers shall be UL classified and labeled as Leakage Class I Smoke Dampers in accordance with the latest version of UL 555S. Dampers shall be warranted to be free from defects in material and workmanship for a period of 5 years after date of shipment. Damper/actuator assembly shall be tested to full open and full close at PLQLPXP ISP *f*) KHDWHG DLU DQG ´ Z J (Specified select: 250° / 350°, 2000 fpm/3000 fpm). (DFK GDPSHU VKDOO EH HTXLSSH FORVXUH´ TXLFN GHWHFW KHDW DFWXDWHG UHOHDVH GH damage resulting from instantaneous damper closure. Release device shall be EFL type and shall allow reset from outside the sleeve after moderate temperature exposure. (Replacement type fusible links not acceptable.)

e.

Where applicable for HVAC work, construct and install sheet metal work in accordance with SMACNA Architectural Sheet Metal Manual.

2. Provide variations in duct size, and additional duct fittings as required to clear obstructions and maintain clearances as approved by the Architect at no extra cost to the Owner.

3. Gauges, joints and bracing shall be in accordance with the California Mechanical Code.

4. Provide beading or cross breaking for all ductwork inside building. Provide cross breaking for ductwork exposed to weather.

5. At the contractor's option, ductwork may be fabricated using the Ductmate, Nexus, Quickduct, Transverse Duct Connection (TDC), Pyramid-Loc duct connection systems, or equal. Fabricate in strict conformance with manufacturer's written installation instructions and in accordance with California Mechanical Code.

   a. Seal flanged ends with pressure sensitive high density, closed cell neoprene or polyethylene tape gasket, Thermo 440, or equal.

   b. Provide metal clips for duct connections, except at breakaway connections for fire dampers and fire smoke dampers. Provide corner clips at each corner of duct, through bolted, at all locations except at breakaway connections for fire dampers and fire smoke dampers. Where used on locations exposed to weather, provide continuous metal clip at top and sides of duct, with 1 inch overhang for top side.

B. Design and installation standards:

1. SMACNA Compliance: Comply with applicable portions of Sheet Metal and Air Conditioning Contractor's National Association (SMACNA) for all work in this section.

2. NFPA Compliance: Comply with ANSI/NFPA 90A, "Standard for the Installation of Air Conditioning and Ventilating Systems," and ANSI/NFPA 90B, "Standard for the Installation of Warm Air Heating and Air Conditioning Systems."

3. California Mechanical Code.

C. Duct sizes indicated are external sizes.

D. Galvanized Sheet Steel: Lock-forming quality, ASTM A924 and ASTM A653, Coating Designation G 90. Provide mill phosphatized finish for exposed surfaces of ducts exposed to view.

1. Provide mill certification for galvanized material at request of the Project Inspector.

E. Duct Sealants:

1. Sealant shall have a VOC content of 250 g/L or less.

2. Sealant shall comply with testing and product requirements of South Coast Air Quality Management District, m 0 612nastrt96 Tf 1 0 0 1 177 0 g 0 G -0/6 Tm 0 g 0 trd .658y Managem

of duct. Duct connection to outlet on exposed duct shall be full size of outer perimeter of outlet flange.

6. Ducts exposed in the conditioned space shall be free of dents and blemishes and be mounted tight against adjacent surface with flat hangers. Remove all fabrication labels from ductwork.

7. Provide 20 gauge minimum for ductwork exposed within occupied spaces.

H. Rectangular Internally Insulated Duct Fabrication:

1. Provide internal duct lining where indicated on the Drawings, with a minimum of 10'-0" length in each direction from the fan, fan casing, or unit casing. Line all transfer ducts.

a. Where ductwork is exposed to weather or outside the building insulation envelope, provide 2 inch thick, 1-1/2 pound density internal lining with matte facing, with an R-Value of 8.0 minimum.

b. Where ductwork is within the building insulation envelope, provide 1 inch thick, 1-1/2 pound density, with R-value of 4.2 minimum.

c. Ducts exposed in the conditioned space shall be free of dents and blemishes and be mounted tight against adjacent surface with flat hangers. Remove all fabrication labels from ductwork.

d. Where installed exposed in the conditioned space, duct shall be minimum 20 gauge with 1 inch insulation layer (minimum R-value ±R-4.2).

e. Cement duct liner in place with nonflammable, non-hardening duct adhesive. Seal all raw edges of insulation inside ductwork with adhesive, including longitudinal liner edges.

f. Provide metal nosing at all locations where liner is preceded by unlined metal.

g. Provide sheet metal weld pins and washers or clinch pins and washers on all ductwork on 12 inch intervals with the first row within 3 inches of the leading edge of each piece of insulation and within 4 inches of corners. No use of adhesive mounted pins will be considered.

1) Install clinched pin fasteners with properly adjusted automatic fastening equipment. Manual installation will not be considered.

2) Install weld pins with properly adjusted automatic fastening equipment. Installation shall not damage the galvanized coating on the outside of the duct.

h. All ductwork, adhesives, lining, sealant, flex duct and the like shall have a flame spread of 25 or less and developed smoke rating of 50 or less when tested in accordance with one of the following test methods: NFPA 255, ASTM E84, or UL 723.

i. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include the following, or equal:

Manufacturer:	Product:
Johns Manville	Linacoustic RC
CertainTeed Corporation	ToughGard

Diameter	Minimum Gauge
3" to 36"	20
38" to 50"	18
Over 50"	16

6. Ducts exposed in the conditioned space shall be free of dents and blemishes and be mounted tight against adjacent surfai17 0 G [(3")7(t)-9 -0.017ht2 [(3")7(t)-9 -0.017ht2 f* Q EMC /P <</MCID 57.93g

M. Fabric Duct Air Dispersion System:

1. Duct:

1) Fasteners: Black steel or stainless steel to match material used for the duct. Panel fasteners shall not penetrate duct wall.

2) Gasket: Comply with NFPA 96, grease-tight, high temperature ceramic fiber, rated for minimum 1500 °F.

3) Minimum Pressure rating: 10 inches wg., positive or negative.

b. Available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:

1) Ductmate Industries, Inc.

2) 3M.

3) Flame Gard, Inc.

3. Field-Applied Grease Duct Enclosure:

a. Thermal Ceramics Firemaster FastWrap XL, or equal, field-applied grease duct enclosure listed in accordance with ASTM E 2336.

O. Kitchen Exhaust Ducts (Type 2):

1. Cooking Equipment Exhaust Ducts:

a. Fabricate kitchen exhaust ducts and supports used for removal of vapor, heat and odors from cooking equipment of 16 gauge minimum black steel EMC.6 gauge minimum black steel61( )4

1. Fabricate ducts and supports of 18 gauge minimum, Type 304, stainless steel. All duct seams and joints shall be welded. Finish exposed stainless steel with Number 4 finish.

R. Shower exhaust ducts: Provide ducts and supports from stainless steel for a length of 20 feet from exhaust grille or register.

S. Fume Hood Exhaust Ducts:

1. Round Ductwork:

a. Provide 18 gauge 304 stainless steel duct with spiral lockseam and welded joints. Fittings shall be 304 stainless steel, solid welded.

2. Rectangular Duct:

a. Provide 18 gauge 304 stainless steel duct with Pittsburgh lockseam and welded joints. Fittings shall be 304 stainless steel, solid welded.

3. Duct Finish: Where exposed to view, Number 4 finish.

4. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include the following, or equal:

a. McGill Airflow, Inc.

b. SEMCO LLC.

T. Flexible Connectors:

1. Materials: Flame-retardant or noncombustible fabrics. Coatings and adhesives shall comply with UL 181, Class 1, with flame spread index of 25 or less, and smoke-developed index of 50 or less.

2. Metal-Edged Connectors: Factory fabricated with a fabric strip 3 inches wide attached to two strips of 3-inch-wide, 0.028-inch-thick, galvanized sheet steel or 0.032-inch-thick aluminum sheets. Provide metal compatible with connected ducts.

3. Flexible Connector Fabric: Glass fabric double coated with weatherproof, synthetic rubber resistant to UV rays and ozone.

a. Minimum Weight: 26 oz./sq. yd.

b. Tensile Strength: Minimum 475 lbf/inch in the warp and minimum 375 lbf/inch in the filling.

c. Service Temperature: Minus 50 to plus 200 deg F.

4. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include the following, or equal:

a. Ductmate Industries, Inc., model Proflex.

b. Ventfabrics, Inc., model Ventlon.

2.27 HYDRONIC PIPING

A. Provide piping materials and factory-fabricated piping products of sizes, types, pressure ratings, temperature ratings, and capacities as indicated. Provide .00000923T9(di)7(c)-5sucts of sizes, etes(475)]icucts

B. Chilled Water, Heating Hot Water, and Condenser Water Piping:

1. Copper Tube and Fittings Aboveground:

a. Copper Tube and Fittings Aboveground: ASTM B88, Type L, drawn-temper, 150 psig minimum working pressure at 200 deg. F. Provide wrought-copper fittings and unions, ASTM B16.22, with full solder cup. Capped outlets shall be Schedule 40 screwed brass.

2. Steel Pipe and Fittings Aboveground:

a. 2 inches and smaller: ASTM A 53/A 53M, Schedule 40 black steel with plain ends, 150 psig minimum working pressure at 200 deg. F. Provide malleable-iron threaded fittings, ASTM B16.3, Class 150, and unions, ASTM B16.39, Class 150, and cast-iron flanges and flange fittings, and threaded joints.

b. 2-1/2 inches and larger: ASTM A 53/A 53M, Schedule 40 black steel with plain ends, 150 psig minimum working pressure at 200 deg. F. Provide wrought-steel fittings, ASTM A 234/A 234M, and wrought-cast or forged-steel flanges and flange fittings, ASME B16.5, material group 1.1, with butt welding end connections and raised face.

3. Underground Hydronic Piping:

a. Refer to Section 232113.13, Underground Hydronic Piping.

2.28 HYDRONIC PUMPS

A. Close-Coupled, End Suction Centrifugal Pumps

1. Description: Factory-assembled and -tested, centrifugal, overhung-impeller, close-coupled, cast iron, bronze-fitted, end-suction pump as defined in HI 1.1-1.2 and HI 1.3; designed for installation with pump and motor shafts mounted horizontally.

2. Pump Construction:

a. Casing: Radially split, cast iron, drain plug at bottom and air vent at top of volute, threaded gage tappings at inlet and outlet, and flanged connections.

b. Impeller: ASTM B 584, cast bronze or cast brass; statically and dynamically balanced, keyed to shaft, and secured with a locking cap screw. For constant-speed pumps, trim impeller to match specified performance.

c. Pump Shaft: Steel, with copper-alloy shaft sleeve.

d. Mechanical Seal: Carbon rotating ring against a ceramic seat held by a stainless-steel spring, and Buna-N bellows and gasket. Include water slinger on shaft between motor and seal.

HEATING,

d. Tour & Andersson.

e. Circuit Sensor with butterfly valve above 3 inches.

f. Illinois Series 5000 through 2 inches.

D. Pressure Independent Flow Limiting Balancing Valves:

2.32 VALVES

A. Gate Valves:

1. 2-1/2 inches and smaller: Class150, bronze body, union bonnet, rising stem, solid wedge, threaded or solder ends, conforming to MSS SP-80. Hammond IB641, IB648, Nibco T-134, S-134, Milwaukee 1151, 1169, or equal.

2. 3 inches and larger: Class 125, iron body, bronze mounted, bolted bonnet, non-rising stem, solid wedge, flanged ends, conforming to MSS SP-70. Hammond IR-1138, Nibco F619, Milwaukee F2882A, Stockham G-612, or equal.

3. Underground valves 2 inches thru 12 inches: 250 psi, iron body, Non-rising stem, bolted bonnet, resilient wedge valves, conforming to AWWA C509, equipped with operating nuts, Mueller Series 2360, Nibco F-619-RW-SON, or equal.

   a. Underground valves 3 inches and smaller may be furnished with operating nuts or hand-wheels, and with Ring-Tite joint ends.

   b. Furnish and deliver to Owner one wrench of each size required for operating underground valves.

B. Ball Valves:

1. 2 inches and smaller: 600 psi CWP, 150 psi SWP, cast bronze body, full port, two piece, threaded ends, and reinforced PTFE seal, conforming to MSS SP-110. Nibco T585-70, Milwaukee BA-400, Stockham T-285, or equal.

2. 2-1/2 inches and larger: Class 150, carbon steel body, full port, two piece, stainless steel vented ball, flanged ends, and reinforced PTFE seal, conforming to MSS SP-72. Nibco F-515-CS-F-66-FS, Milwaukee F20-CS-15-F-02-GO-VB, or equal.

C. Swing Check Valves: Class 125 or 150, bronze body, suitable for regrinding, threaded ends, conforming to MSS SP-80. Stockham B-321, Milwaukee 509, or equal.

D. Butterfly Valves:

1. General: Tight closing, full lug type, with resilient seat suitable for minimum working pressure of 200 psig, conforming to MSS SP-67. Bi-direction dead end service with downstream flange removed.

2. Provide valves with the following:

   a. Seats: Suitable for 40 degrees F for cold water service and 250 degrees F for hot water service. Seats shall cover inside surface of body and extend over body ends.

   b. Bodies: Ductile iron or cast iron.

   c. Discs: Bronze or stainless steel.

   d. Stems or Shafts: Stainless steel.

   e. Control Handles: Suitable for locking in any position or with 10 degree or 15 degree notched throttling plates to hold valve in selected position. Provide extended necks to compensate for insulation thickness. Provide gear operator for valves 5 inches and larger.

3.

a. 2 through 12 inches: Milwaukee Valve, CL series, Nibco, Inc., model LD2000-3, or equal.

E. Silent Check Valves (for use on pump discharge):

1. General: Provide spring loaded check valves at pump discharge of all pumps.

a. 2 inches and smaller: 250 psi CWP, bronze body, Nibco Model T-480, Milwaukee 548-T, or equal.

b. 2-1/2 inches and larger: Class 250, cast iron body, wafer style, suitable for regrinding. Nibco Model F960, Milwaukee 1400, Mueller 103MAP, or equal.

2.33 VALVE BOXES

A. General:

1. Where several valves or other equipment are grouped together, provide larger boxes of rectangular ³YDXOW´ W\SH DGHTXDWHO\ VL]HG IRU FRQGLWLRQ DQG VLPLC

2.

7.

1. Air inlets, outlets, or other services weighing not more than 56 pounds shall have two No. 12 gauge hangers connected from the terminal or service to the structure above. These wires may be slack.

2. Support air inlets, outlets, or other services weighing more than 56 pounds directly from the structure above by approved hangers. Provide 4 taut 12 gauge wires each, attached to the fixture and to the structure above. The 4 taut 12 gauge wires, including their attachment to the structure above must be capable of supporting 4 times the weight of the unit.

3. Secure air inlets and outlets to main runners of ceiling suspension system with two No. 8 sheet metal screws at opposing corners.

D. Furnish all air inlets and outlets with a baked prime coat unless otherwise noted. Provide off-white baked enamel finish on ceiling-mounted air inlets and outlets. Paint exposed mounting screws to match the material being secured.

E. Air inlets and outlets shall match all qualities of these specified including appearance, throw, noise level, adjustabilityTf .

3.11 DAMPER INSTALLATION

A. All dampers automatically controlled by damper motors are specified under "Temperature Control System" except those specified with items of equipment.

B. Provide opposed blade manual air dampers at each branch duct connection and at locations indicated on the drawings and where necessary to control air flow for balancing system. Provide an opposed blade balancing damper in each zone supply duct. Provide an access panel or Ventlok flush type damper regulator on ceiling or wall for each concealed damper.

C. Install fusible link fire dampers full size of duct at points where shown or required.

D. Provide 18 inch x 12 inch minimum hinged access doors in ductwork and furring for easy access to each fire damper; insulated access doors in insulated ducts. Label access doors with 1/2 inch high red letters.

1. Provide Ventlok Series 100, Durodyne, or equal access doors with hardware for convenient access to all automatic dampers and other components of the system, insulated type in insulated ducts. Provide Ventlok #202 for light duty up to 2 inch thick doors, #260 heavy-duty up to 2 inch thick doors and #310 heavy-duty for greater than 2 inch thick doors. Provide #260 hinges on all hinged and personnel access doors; include gasketing.

3.12 DUCTWORK INSTALLATION

A. General:

1. Assemble and install ductwork in accordance with recognized industry practices which will achieve air tight and noiseless (no objectionable noise) systems capable of performing each indicated service. Install each run with minimum of joints. Align ductwork accurately at connections within 1/8 inch misalignment tolerance and with internal surfaces smooth. Support ducts rigidly with suitable ties, braces, hangers, and anchors of type which will hold ducts true to shape and to prevent buckling. Where possible, install ductwork to clear construction by 1/4 inch minimum, except at air inlets and outlets. Where ductwork will not clear construction, secure duct firmly to eliminate noise in the system.

2. Duct Joints: Install duct sealers, pop rivets or sheet metal screws at each fitting and joint. Duct sealers shall be fire retardant. Sheet metal screws for for fseo* n BT /F2S(e)eo* n BT /F2S(e)

1.

D. All duct systems (supply, return, outside air intake, and exhaust), except those identified on compliance forms on Drawings as requiring Acceptance Testing per the requirements of the California Energy Code,

2. At Contractor's option, Link-Seal, Metraflex Metraseal, or equal, casing seals may be used in lieu of caulking. Wrap pipes through slabs on grade with 1 inch thick fiberglass insulation to completely isolate the pipe from the concrete.

C. Floor, Wall, and Ceiling Plates:

1. Fit all pipes with or without insulation passing through walls, floors, or ceilings, and all hanger rods penetrating finished ceilings with chrome-plated or stainless escutcheon plates.

D. Firestopping:

1. Pack the annular space between pipe sleeves and pipes penetrating floors and walls with ULTJ Eu12 792

0.0912 0 0 12 458.25 Tm [(Wall and Floor)-6(Penetration Firestop)] TJ ET Q q 0.00000912 0 612 792 re W n BT /F2 9.96 Tf 1 0 0 1 115.22 58721.8Tm 0 g 0 G [(0.0178 Tc[(1.)] TJ ET Q q 0.00000912 0 612 792 re W

D. Copper Pipe and Tubing: All joints shall be brazed according to ASME Section IX, Welding and Brazing

b. Note 2: Spacing of hangers and supports for piping assembled with mechanical joints shall be in accordance with standards acceptable to authorities having jurisdiction.

c. Note 3: Includes refrigerant piping, including vapor and hot gas pipes.

4. Suspended Piping:

a. Individually suspended piping: B-Line B3690 J-Hanger or B3100 Clevis, complete with threaded rod, or equal. All hangers on supply and return piping handling heating hot water or steam shall have a swing connector at point of support.

Pipe Size	Rod Size Diameter
2" and Smaller	3/8"
2-1/2" to 3-1/2"	1/2"
4" to 5"	5/8"
6"	3/4"

b. Suspend rods from concrete inserts with removable nuts where suspended from concrete decks. Power actuated inserts will not be allowed.

c. Trapeze Suspension: B-Line, or equal, 1-5/8 inch width channel in accordance with PDQXIDFWXUHUV¶ SXEOLVKHG ORDG UDWLQJV 1R GHIOHFW

d. Trapeze Supporting Rods: Shall have a safety factor of five; securely anchor to building structure.

e. Pipe Clamps and Straps: B-Line B2000, B2400, or equal. Where used for seismic support systems, provide B-Line B2400 series, or equal, pipe straps.

f. Concrete Inserts: B-line B22-I continuous insert or B2500 spot insert. Do not use actuated fasteners for support of overhead piping unless approved by Architect.

g. Steel Connectors: Beam clamps with retainers.

5. Provide support for piping through roof, arranged to anchor piping solidly in place at the roof penetration.

6. Insulated Piping:

a. Do not interrupt insulation at pipe hangers and clamps.

b. Use thermal hanger shield inserts or MSS protection saddles and shields.

c. Thermal Hanger Shield Inserts:

1) Use thermal-hanger shield insert with clamp sized to match OD of insert.

2) Do not exceed pipe stress limits allowed by ASME B31.9 for building services piping.

3) For below ambient services, maintain continuous vapor barrier.

4)

5) For Trapeze or Clamped Systems: Install thermal-hanger shield inserts with heavy-duty insulation protection shields. Install additional 180-degree galvanized shield for top of support if clamping is required.

d. MSS Protection Saddles and Shields:

1) MSS SP-58, Type 39, protection saddles if insulation without vapor barrier is indicated. Fill interior voids with insulation that matches adjoining insulation.

2) MSS SP-58, Type 40, protective shields on cold piping with vapor barrier. Shields shall span an arc of 180 degrees.

3) Shield Dimensions for Pipe: Of length recommended in writing by manufacturer to prevent crushing insulation. Not less than the following:

a) NPS 1/4 to NPS 3-1/2: 12 inches long and 0.048 inch thick.

b) NPS 4: 12 inches long and 0.06 inch thick.

c) NPS 5 and NPS 6: 18 inches long and 0.06 inch thick.

d) NPS 8 to NPS 14: 24 inches long and 0.075 inch thick.

e) NPS 16 to NPS 24: 24 inches long and 0.105 inch thick.

F. Piping Support to Structure:

1. Wood Structure: Provide and install wood blocking as required to suit structure. Provide lag screws or through bolts with length to suit requirements, and with size (diameter) to match the size of hanger rods required.

a. Do not install Lag screws in tension without written review and acceptance by Structural Engineer.

Side Beam Angle Clip	B-Line B3062--MSS Type 34
Side Beam Angle Clip	B-Line B3060
Ceiling Flange	B-Line B3199

b. Blocking for support of piping shall be not less than 2 inch thick for piping up to 2 inch size. Provide 3 inch blocking for piping up through 5 inch size, and 4 inch blocking for larger piping. Provide support for blocking in accordance with Structural Engineers requirements.

c. Where lag screws are used, length of screw shall be 1/2 inch less than the wood blocking. Pre-drill starter holes for each lag screw.

2. Steel Structure: Provide and install additional steel bracing as required to suit structure. Provide through bolts with length to suit requirements of the structural components. Burning or welding on any structural member may only be done if approved by the Architect.

G. 'XFW +DQJHU DQG 6XSSRUW 6SDFLQJ &RQIRUP WR 5HTXLUHPHQ &RQVWUXFWLRQ 6WDQGDUGV 0HWDO DQG)OH[LEOH ´

H. Duct Support to Structure:

1. Upper connection of support to wood structure shall be with wood screws or lag screws in shear fastened in the upper one 50ll

b. Variable refrigerant flow (VRF) heat pump systems: Insulation for VRF system refrigerant piping shall be installe G D F F R U G L Q J W R 9 5) X Q L W P D Q X I D F W X U H U ¶ V

3. PVC Jacket Installation:

a. Where PVC jackets are indicated, install with 1-inch overlap at longitudinal seams and end joints; for horizontal applications. Seal with manufacturer's recommended adhesive.

1) Apply two continuous beads of adhesive to seams and joints, one bead under lap and the finish bead along seam and joint edge.

4. Aluminum Jacket Installation:

a. Where insulated piping is exposed to the weather apply aluminum jacket secured with 1/2 inch stainless-steel bands on 12 inch centers. Install jacketing with 2-inch overlap at longitudinal seams and end joints. Overlap longitudinal seams arranged to shed water. Seal

a. Where PVC jackets are indicated, install with 1-inch overlap at longitudinal seams and end joints; for horizontal applications. Seal with manufacturer's recommended adhesive.

1) Apply two continuous beads of adhesive to seams and joints, one bead under lap and the finish bead along seam and joint edge.

D. Equipment Insulation Installation:

1. General:

a. Insulate pumps, coil u-bends where exposed outside airstream, air separators, heating hot water and chilled water storage tanks, and other elements that are in series with the fluid flow, according to the requirements of the California Energy Code.

2. Mineral-Fiber, Pipe and Tank Insulation Installation for Tanks and Vessels: Secure insulation with adhesive and anchor pins and speed washers.

a. Apply adhesives according to manufacturer's recommended coverage rates per unit area, and for percent coverage of tank and vessel surfaces.

b. Groove and score insulation materials to fit as closely as possible to equipment, including contours. Bevel insulation edges for cylindrical surfaces for tight joints. Stagger end joints.

c. Protect exposed corners with secured corner angles.

d. Install adhesively attached or self-sticking insulation hangers and speed washers on sides of tanks and vessels as follows:

1) Do not weld anchor pins to ASME-labeled pressure vessels.

2) Select insulation hangers and adhesive that are compatible with service temperature W* n B

or tank at a minimum spacing of 48 inches o.c. Use this network for securing insulation with tie wire or bands.

g. Stagger joints between insulation layers at least 3 inches.

h. Install insulation in removable segments on equipment access doors, manholes, handholes, and other elements that require frequent removal for service and inspection.

i. Bevel and seal insulation ends around manholes, handholes, ASME stamps, and nameplates.

j. For equipment with surface temperatures below ambient, apply mastic to open ends, joints, seams, breaks, and punctures in insulation.

3. Flexible Elastomeric Thermal Insulation Installation for Tanks and Vessels: Install insulation over entire surface of tanks and vessels.

a. Apply 100 percent coverage of adhesive to surface with manufacturer's recommended adhesive.

b. Seal longitudinal seams and end joints.

4. Insulation Installation on Pumps:

a. Fabricate metal boxes lined with insulation. Fit boxes around pumps and coincide box joints with splits in pump casings. Fabricate joints with outward bolted flanges. Bolt flanges on 6-inch centers, starting at corners. Install 3/8-inch- diameter fasteners with wing nuts.

3.23 EQUIPMENT START-UP

A. Initial start-up of the systems and pumps shall be under the direct supervision of the Contractor.

B. Equipment start-up shall not be performed until the piping systems have been flushed and treated and

1. Vapor piping for heat pump applications smaller than 1-1/2 inches diameter:
    a. Flexible Elastomeric: 1-1/2 inches thick.
    b. Mineral-Fiber, Preformed Pipe: 1-1/2 inches thick.
2. Vapor piping for heat pump applications 1-1/2 inches diameter and larger:
    a. Flexible Elastomeric: 2 inches thick.
    b. Mineral-Fiber, Preformed Pipe: 2 inches thick.
3. Liquid piping for heat pump applications smaller than 1 inch diameter:
    a. Flexible Elastomeric: 1 inch thick.
    b. Mineral-Fiber, Preformed Pipe: 1 inch thick.
4. Liquid piping for heat pump applications 1 inch diameter and larger:
    a. Flexible Elastomeric: 1-1/2 inch thick.
    b. Mineral-Fiber, Preformed Pipe: 1-1/2 inch thick.

C. Hydronic Piping:

1. Chilled Water Piping:
    a. Piping smaller than 1-1/2 inches diameter:
        1) Mineral-Fiber, Preformed Pipe: 1/2 inch thick.
    b. Piping 1-1/2 inches diameter and larger:
        1) Mineral-Fiber, Preformed Pipe: 1 inch thick.
2. Heating Hot Water Piping:
    a. Piping smaller than 1-1/2 inches diameter:
        1) Mineral-Fiber, Preformed Pipe: 1-1/2 inch thick.
    b. Piping 1-1/2 inches diameter and larger:
        1) Mineral-Fiber, Preformed Pipe: 2 inches thick.

3.28 OUTDOOR, ABOVEGROUND PIPING INSULATION SCHEDULE

A. Refrigerant Suction and Hot-Gas Piping, Cooling-Only Systems:

1. All Pipe Sizes: Insulation shall be one of the following:
    a. Flexible Elastomeric: 1 inch thick.
    b. Mineral-Fiber, Preformed Pipe: 1 inch thick.

B. Refrigerant Vapor and Liquid Piping, Heat Pump Systems:

1. Vapor piping for heat pump applications smaller than 1-1/2 inches diameter:

2. Mineral-Fiber Board: Thickness equal to insulation thickness for connected pipes and 3-lb/cu. ft. nominal density.

3. Mineral-Fiber Pipe and Tank: Thickness equal to insulation thickness for connected pipes.

SECTION 26 00 10

BASIC ELECTRICAL REQUIREMENTS

PART 1 - GENERAL

1.01 SUMMARY

A. Table of Contents, Division 26 - Electrical:

SECTION NO.	SECTION TITLE
260010	BASIC ELECTRICAL REQUIREMENTS
260060	POWER SYSTEM STUDY
260090	ELECTRICAL DEMOLITION
260513	MEDIUM-VOLTAGE CABLES
260519	BUILDING WIRE AND CABLE
260526	GROUNDING AND BONDING
260529	ELECTRICAL HANGERS AND SUPPORTS
260531	CONDUIT
260533	BOXES
260536	CABLE TRAYS

260539 [(2)-3(6)7(0)-3(5)7(3)-3(6)] TJ ET Q q 0.00000912 0 612 792 re W* n BT /F1 116EHI104 T

262736	ENERGY INFORMATION SYSTEMS
262816	OVERCURRENT PROTECTIVE DEVICES
262819	DISCONNECT SWITCHES
262900	MOTOR CONTROLS
263100	PHOTOVOLTAIC POWER SYSTEMS
263213	PACKAGED ENGINE GENERATOR SYSTEM
263323	CENTRAL BATTERY INVERTER SYSTEM
263350	STATIC UNINTERRUPTIBLE POWER SUPPLY
263353	STATIC UNINTERRUPTIBLE POWER SUPPLY
263356	MULTIPLE STATIC UNINTERRUPTIBLE POWER SUPPLY
263623	TRANSFER SWITCHES
263633	AUTOMATIC STATIC TRANSFER SWITCHES
264113	LIGHTNING PROTECTION SYSTEM
264313	SURGE PROTECTIVE DEVICES
265000	LIGHTING
266113	FIRE ALARM SYSTEM
266213	FM200/PREACTION FIRE SUPPRESSION INTERFACE
266226	TWO-WAY COMMUNICATION SYSTEM
266316	DISTRIBUTED ANTENNA SYSTEMS (DAS)

C. Related Work: Consult all other Sections, determine the extent and character of related Work, and properly coordinate Work specified herein with that specified elsewhere to produce a complete and operable installation.

1. General and supplementary conditions: Drawings and general provisions of Contract and Division 01 of the Specifications, apply to all Division 26 Sections.

2. Earthwork: Include trenching, backfilling, boring and soil compaction as required for the installation of underground conduit, in-grade pull boxes, vaults, lighting pole foundations, etc. Refer to Division 31, Earthwork.

3. Selective demolition: Nondestructive removal of materials and equipment for reuse or salvage as indicated. Also dismantling electrical materials and equipment made obsolete by these installations. Refer to Division 02, Selective Demolition.

4. Concrete work: Include forming, steel bar reinforcing, cast-in-place concrete, finishing and grouting as required for underground conduit encasement, light pole foundations, pull box slabs, vaults, housekeeping pads, etc. Also includes setting of floor boxes in existing concrete slabs, sawcutting of existing slabs and grouting of conduits in saw cut. Refer to Division 03, Concrete.

5. Miscellaneous metal work: Include fittings, brackets, backing, supports, rods, welding

3. Flow switches and valve monitors for sprinkler system.
4. Elevator controllers.
5. Pre-wired electrified partition furniture.
6. Temperature control panel(s). (Line voltage only)
7. Irrigation controller(s). (Line voltage only)
8. FM-200 control panel. (Line voltage only)
9. Kitchen equipment and appliances.
10. Laboratory equipment.
11. Electric signage.
12. Electric door locks.
13. Electric heat trace tape.
14. Door hold-open/release devices.
15. Variable frequency drive units.
16. Chiller starters.
17. Motorized roll down/sliding doors and grills.
18. Motorized dock levelers.
19. Projection screens.

E. Items furnished under this Division, but installed and connected under another Division includes but is not limited to:
   1. Diesel generator day tank. (Division 22)
   2. Diesel generator silencer. (Division 23)
   3. Generator daytank fuel strainer, manual fuel pump, check valve and any other specified accessories. (Division 22)
   4. Remote radiator for generator. (Division 22)

F. Items furnished under another Division, but installed and connected under this Division includes but is not limited to:
   1. Wall mounted control stations for motorized roll down and sliding doors.
   2. Electric fire sprinkler water flow bells.
   3. Speed control switches for ceiling exhaust fans.

1.02 QUALITY ASSURANCE

G. All electrical apparatus furnished under this Section shall conform to NEMA standards and the CEC and bear the UL label where such label is applicable.

H. Certify that each welder performing Work has satisfactorily passed AWS qualification tests for welding processes involved and, if pertinent, has undergone re-certification.

1.03 DEFINITION OF TERMS

A. The following list of terms as used in the Division 26 documents shall be defined as follows:

1. "Provide": Shall mean furnish, install, and connect unless otherwise indicated.

2. "Furnish": Shall mean purchase and deliver to Project site.

3. "Install": Shall mean to physically install the items in place.

4. "Connect": Shall mean make final electrical connections for a complete operating piece of equipment.

5. "As directed": Shall be as directed by the Owner or their authorized Representative.

6. "Utility Companies": Shall mean the company providing electrical, telephone or cable television services to the Project.

1.04 SUBMITTALS

A. Format: Furnish submittal data in electronic format for each Specification Section with a table of contents listing materials by Section and paragraph number.

B. Submittals shall consist of detailed Shop Drawings, Specifications, block wiring diagrams, "catalog cuts" and data sheets containing physical and dimensional information, performance data, electrical characteristics, materials used in fabrication and material finish. Clearly indicate by arrows or brackets precisely what is being submitted on and those optional accessories which are included and those which are excluded. Furnish quantities of each submittal as noted in Division 01.

C. Each submittal shall be labeled with the Specification Section Number and shall be accompanied by a cover letter or shall bear a stamp stating that the submittal has been thoroughly reviewed by the Contractor and is in full compliance with the requirements of the Contract Documents or provide a Specification Section line-by-line compliance response statement with detailed exception/ deviation response statements for all applicable provisions for the applicable Specification Section. Any Specification Section lines without a detailed exception/ deviation response statement shall be treated as the Contractor or Vendor is submitting in full compliance with the applicable Specification Section requirements. Cover letters shall list in full the items and data submitted. Failure to comply with this requirement shall constitute grounds for rejection of data.

D. The Contractor shall submit detailed Drawings of all electrical equipment rooms and closets if the proposed installation layout differs from the construction documents. Physical size of electrical equipment indicated on the Drawings shall match those of the electrical equipment that is being submitted for review, i.e.: switchboards, panelboards, transformers, control panels, etc. Minimum scale: 1/4" = 1'-0". Revised electrical equipment layouts must be approved prior to release of order for equipment and prior to installation.

E. As part of the equipment and fixture submittals, the Contractor shall provide and
calculations for floor and wall mounted electrical equipment and fixtures, distribution
conduits and raceways, in conformance with the 2022 California Building Code (CBC) and
ASCE-7-16. Use the Occupancy Category, Ground Accelerations, Site Class, Seismic Design
Category, and Seismic Importance Factor as noted in the structural drawings. For
components required for Life Safety or containing hazardous materials use Ip=1.5.
Structural Calculations shall be prepared, stamped, and signed by a California Registered
Structural Engineer. Specify proof loads for drilled-in anchors, if used.

F. The Manufacturer shall recommend the method of anchoring the equipment to the
mounting surface and shall provide the Contractor with the assembly dimensions, weights,
and approximate centers of gravity.

G. Review of Submittals to ensure general conformance with Design Concept and General Compliance
with the Specification

A. Provide Project Record Drawings as described herein:

1. Drawings shall fully represent installed conditions including actual locations of outlets, true panelboard connections following phase balancing routines, conduit and wire sizing as well as routing, revised luminaire schedule listing Manufacturers and products installed

5. Engineered Series Combination Systems: CEC Article 110.22 (B).
6. Tested Series Combination Systems: CEC Article 110.22 (C).
7. Available Fault Current: CEC Article 110.24.
8. Depth of Working Space in Existing Buildings: CEC Article 110.26 (A)(1)(c).
9. Guarding of Live Parts: CEC Article 110.27 (C).
10. Locked Rooms or Enclosures: CEC Article 110.34 (C).
11. Manholes: CEC Article 110.75 (E).

1.07 OPERATION AND MAINTENANCE MANUALS

A. Prior to Project closeout furnish to the Owner, six (6) hard bound 3 ring binders containing all bulletins, operation and maintenance instructions, part lists, service telephone numbers and other pertinent information as noted in each Section all equipment furnished under Division 26. Binders shall be indexed into Division Sections and labeled for easy reference. Bulletins containing more information than the equipment concerned shall be properly stripped and assembled.

1.08 PROJECT MANAGEMENT AND COORDINATION SERVICES

A. Overview: Contractor shall provide a Project Manager/Engineer for the duration of the Project to coordinate the Division 26 Work with all other trades. Coordination services, procedures and documentation responsibility shall include, but shall not be limited to the items listed in this Section.

B. Review of Shop Drawings prepared by other Subcontractors:

1. Obtain copies of all Shop Drawings for equipment provided by others that require electrical service connections or interface with Division 26 Work.
2. Perform a thorough review of the Shop Drawings to confirm compliance with the service requirements contained in the Division 26 Contract Documents. Document any discrepancy or deviation as follows:
    a. Prepare memo summarizing the discrepancy.
    b. Provide a copy of the specific shop drawing, indicating via cloud, the discrepancy.
3. Prepare and maintain a shop drawing review log indicating the following information:
    a. Shop drawing number and brief description of the system/material.
    b. Date of your review.
    c. Indication if follow-up coordination is required.

C. Request for information (RFI):

1. Thoroughly review the Contract Documents prior to the preparation and submission of an RFI. If an RFI is submitted, attach 8 1/2" x 11" copies of all relevant documents to clarify the issue.
2. Prepare and maintain an RFI log indicating the following information:
    a. RFI number and brief summary of the issue.

b. Date of issuance and receipt of response.

D. Clarification confirmation memo (CCM):

1. Either the Contractor will prepare CCM memos or the Engineer to confirm a decision clarifying the Contract Documents that does not impact cost or affect the schedules.

2. Prepare and maintain a CCM log indicating the following information:

a. CCM number: Use CCM-C1, C2, etc. for memos issued by the Contractor and CCM-E1, E2, etc. for memos issued by the Engineer.

b. Brief summary of issue and date issued.

1.09 CONTRACT PRICING MODIFICATION PROCEDURES

A. Submission guidelines: This Section covers the criteria for direct costs, markups, and documentation requirements to be followed by the Contractor for any pricing modification to the Base Contract, where unit pricing has not already been established.

1. Change orders: Pricing for additions or deletions to the Base Contract Scope of Work upon acceptance of bid value and receipt of authorization to proceed.

2. Allowances: Cost allowances may be assigned for specific Scope of Work breakdown within the Base Contract where design has not been fully delineated on the Contract Documents. When detailed information is available, the Contractor shall prepare and submit a price quotation for the Work. This price quotation will be compared to the allowance value and any adjustments necessary to the Base Contract value shall be made via change order.

B. Direct costs:

1. Labor:

a. Hourly labor rates shall not exceed the prevailing wage for the County where the Work is being performed. The costs for labor supervision, including general superintendents and foremen, shall be included in the markup defined herein. Working foremen will be considered a direct cost only if the individual is on the Project site physically installing Work under the change order.

b. Labor burden shall be based on rates currently in effect at the time the Work under the change order is being performed and shall include only fringe benefits by governing trade organizations, Federal Insurance Contribution Act, Federal and State Unemployment taxes, payroll taxes and net actual premium paid for public liability insurance required by the Owner. No other cost will be included as labor burden.

c. NECA Manual of Labor Units will be utilized as the basis for determining labor productivity rates for Electrical Work as follows:

1) 85% of NECA column 1 (normal) for change in scope issued well in advance of Work needing to be performed, so as not to cause slowdown or Work stoppage.

2) 100% of NECA column 1 (normal) for Work being performed with other Base Contract Work, not out of sequence and with minimal slowdown or Work stoppage.

3) 100% of NECA column 2 (difficult) for Work performed out of sequence, requiring Work stoppage and reconstruction in areas already complete. This Work may involve the removal of ceiling tiles or the cutting and patching of walls.

d. No labor costs shall be included for the following items since the labor is already covered by the NECA labor units for conduit and construction channel:

1) Conduit straps and clips.

2) Construction channel accessories (nuts, washers, etc.).

3) Screws.

4) }v µ]š o }Á• 2_ v •u oo Œ X

2. Material:

a. The cost of material shall be the direct cost, including sales tax and may include the cost of transportation from the Supplier to the Contractor, but charges for final delivery to the Project site will not be allowed.

b. Electrical commodities priced based on most current Trade Service Book with a 15% discount. Non-commodities priced per invoice from Supplier.

3. Equipment rental:

a. Payment for equipment costs will be made at the rental rates listed for such ‹µ]‰u vš • •‰]( ]]v šZ µŒŒ v š]š]}vU š šZ š]u ^µŒ Z Œ P v ‹µ]‰u vš Z vš o Z š •U_ oš Œ v• Wµ o] shallbe adjusted as appropriate and will be used to compute payments for equipment; regardless of the whether t Z ‹µ]‰u vš]• µv Œ }vš Œ š}Œ[• through direct ownership, leasing, renting or other method of acquisition. Daily, weekly,or monthly rates shall be used, whichever is lower. Hourly rates including operator shall not be used.

b. The actual time to be paid for equipment shall be the time the equipment is in productive operation on the Work. No payment will be made time while equipment is inoperative due to breakdown or for non-working days.

c. Individual pieces of equipment having a replacement value of $1,000 or less shall be considered small tools or small equipment and no payment will be made since the costs of these tools and ‹µ]‰u vš Œ]v o µ • ‰ Œš }-(upš Z }vš Œ
fe W*u6(r)12( )] TJ ET Q q 05 Tm 0 g 0 G [( )] TJ q 0.00000912 0 612 792 re W* n B

A.

6. Calibration standards shall be of higher accuracy than instrument tested.

7. Equipment used for field testing shall be more accurate than instrument being tested.

F. Coordinate with General Contractor regarding testing schedule and availability of equipment ready for testing.

G. Notify Owner and Engineer one week in advance of any testing.

H. Any products which fail during the tests or are ruled unsatisfactory by the Owner's Representative shall be replaced, repaired, or corrected as prescribed by the Owner's Representative at the expense of the Contractor. Tests shall be performed after repairs, replacements or corrections until satisfactory performance is demonstrated.

I. Testing Agency shall maintain written record of tests and shall assemble and certify final test report.

J. Include all test results in the maintenance manuals.

3.06 CLEANING

A. Prior to energizing of electrical equipment, the Contractor shall thoroughly clean the interior of enclosures from construction debris, scrap wire, etc. using Manufacturer's approved methods and materials.

B. Upon completion of Project, prior to final acceptance, the Contractor shall thoroughly clean both the interior and exterior of all electrical equipment per Manufacturers approved methods and materials. Remove paint splatters and other spots, dirt, and debris.

C. Touch-up paint any marks, blemishes or other finish damage suffered during installation.

3.07 PROJECT CLOSEOUT

A. Training:

1. At the time of completion, a period of not less than 4 hours shall be allotted by the Contractor for instruction of building operating and maintenance personnel in the use of all systems. This 4-hour training is in addition to any instruction time called out in the Specifications for specific systems. All personnel shall be instructed at the time, the }vš Œ š}Œ u l]vP oo v •• ŒÇ ŒŒ vP u vš• Á]šZ D vµ(š
The equipment Manufacturer shall be requested to provide product literature and application guides for the users' reference. Costs, if any, for the above sessions shall be paid by the Contractor.

25(es)9(o)-7(r)12(o)3(ther fin)4(ish)5(d)12(am)-4(ag)4(e)7(suf)4(fered du)5(rinjt 0 g98)3(r)3(is.)]
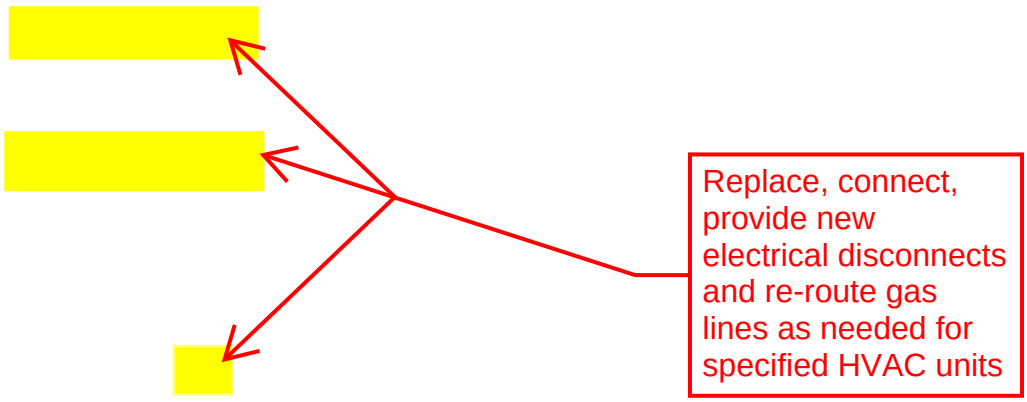
CB WIRE HVAC REPLACEMENT